


| Document No       | Product Name      | Detail                                          | Revision | Prepared by |
|-------------------|-------------------|-------------------------------------------------|----------|-------------|
| KUM-SHBG-2-2012-1 | ESD Shielding Bag | Bag Specification and Printing for customer use | 2012-01  | Erhan Kaya  |
| KUM-SHBG-2-2015-1 | ESD Shielding Bag | Added new dimension (260x300mm)                 | 2015-01  | Erhan Kaya  |

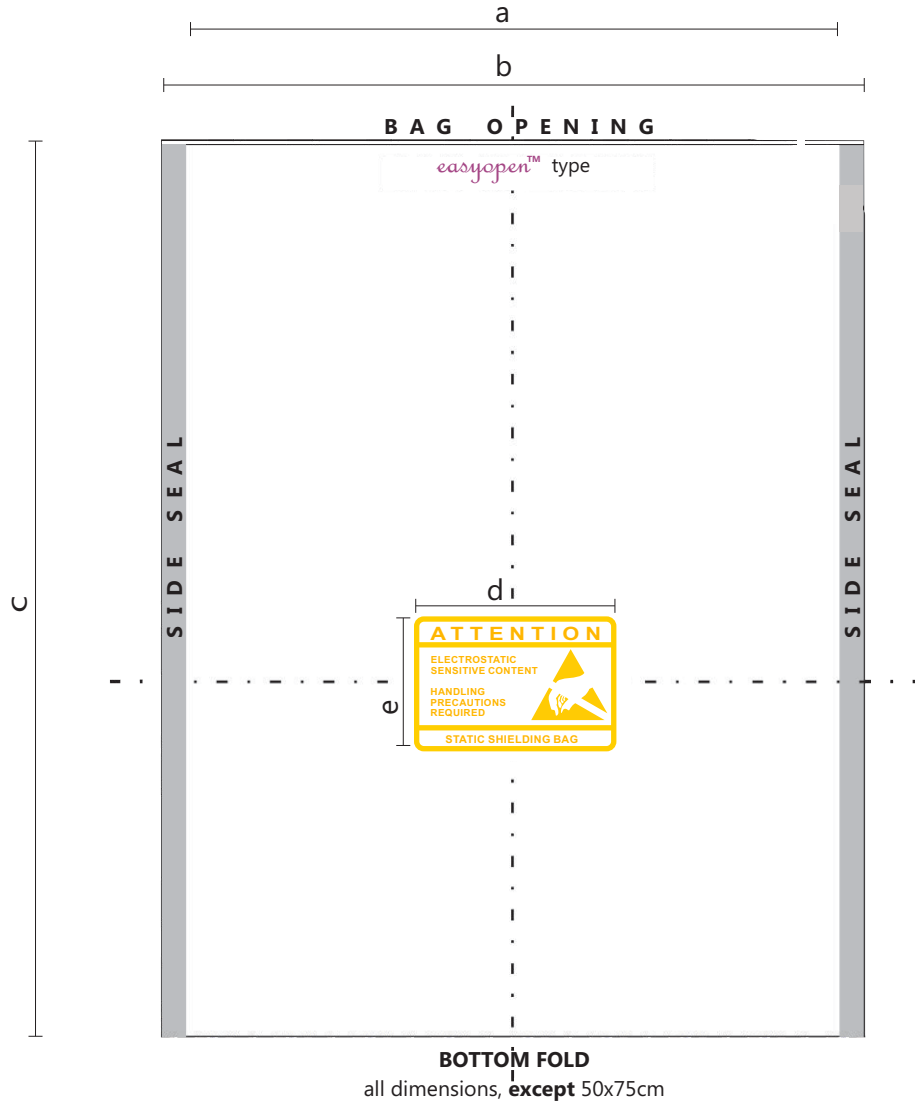

|               |                        |                                      |         |         |         |         |         |         |          |
|---------------|------------------------|--------------------------------------|---------|---------|---------|---------|---------|---------|----------|
| SPEC<br>TABLE | inner dimension(mm)    | 75x125                               | 100x150 | 125x200 | 150x250 | 200x300 | 250x300 | 280x380 | 500x750  |
|               | outer dimension(mm)    | 85x125                               | 110x150 | 135x200 | 160x250 | 210x300 | 260x300 | 290x380 | 520x760  |
|               | print pattern size(mm) | 34x22                                | 34x22   | 45x29   | 55x35   | 64x41   | 85x55   | 85x55   | no print |
|               | pieces per pack        | 100                                  |         |         |         |         |         |         |          |
|               | thickness              | 0.075mm                              |         |         |         |         |         |         | 0.100mm  |
|               | surface resistivity    | $10^8 - 10^{11}$ Ohm                 |         |         |         |         |         |         |          |
|               | heat seal temp         | 120 - 190 deg C                      |         |         |         |         |         |         |          |
|               | tensile strength       | ASTM D882 > 18 lbs/inch              |         |         |         |         |         |         |          |
|               | puncture resistance    | ASTM D3420 > 100 P.S.I               |         |         |         |         |         |         |          |
|               | static removal time    | < 0.01 second FTMS 101 B Method 4046 |         |         |         |         |         |         |          |

## Kumtek Elektronik San ve Tic. Ltd. Sti.

Sancak Mah. 513.Sok 21-2 Cankaya Ankara TURKIYE Tel : +90 312 440 7310 Fax : +90 312 440 7311 info@kumtek.com